


EYE LIGHT PHOTOCELL

features


The Eye Light Photocell is applicable to control the street lighting, passage lighting and doorway lighting automatically in accordance with the ambient lighting level. It will automatically activate your outdoor lights at dusk and shut them off at dawn. This light control offers a weatherproof construction.

This product has been listed by UL Inc and is comply with the Standard for Non-industrial Photoelectric Switches for Lighting Control UL773A.

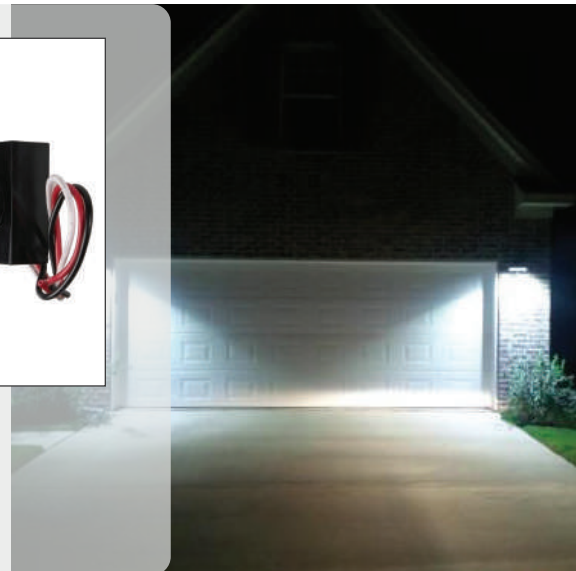

Eye Light Photocell Spec

120-277V	rated voltage
50/60Hz	frequency
1.2W max	power consumption
10-20Lx (on) / 30-60Lx (off)	operate level
2.1(L) x 1.1(W) x 1.7(H)	size (in)
approx. 0.1lbs	weight
7" or custom request	leads length
50,000 hours	life time
5 years	warranty
-40°F to 158°F	working temperature
99%RH	related humidity

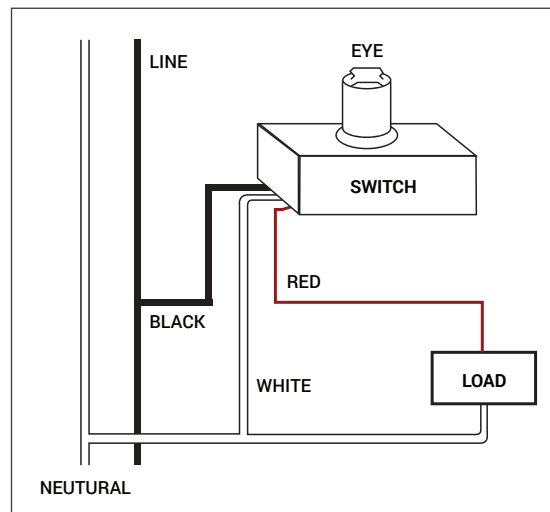

INSTALLATION:

Disconnect power, remove junction box cover, place the SWITCH in knockout hole and fasten with locknut.

Wire according to the diagram in right hand.

Do not install the switch with the Photocell facing artificial or reflected light. This will cause the unit to cycle on and off at night.